







# VRLA Battery **SPB 12-120**

<b>Specifications</b>	<b>Nominal Voltage</b>	12 V				
	<b>Rated Capacity (25 °C)</b>	<b>20hr Rate (1,80V/cell)</b>	<b>10hr Rate (1,80V/cell)</b>	<b>5hr Rate (1,70V/cell)</b>	<b>1hr Rate (1,60V/cell)</b>	
		124 Ah	120 Ah	101,5 Ah	72,7 Ah	
	<b>Dimensions (mm) &amp; Weight (kg)</b>	<b>Length</b>	<b>Width</b>	<b>Height</b>	<b>Overall Height</b>	<b>Weight</b>
		410mm	176mm	227mm	227mm	38 kg
	<b>Number / Type of Terminals</b>	2 / M8				

## Technical Characteristics

<b>Design Life at 20°C</b>	10-12 years
<b>Eurobat Classification</b>	High Performance
<b>Internal Resistance (Fully charged - 25°C)</b>	4,3 mΩ
<b>Short-circuit current</b>	2250 A
<b>Max Charging Current</b>	36 A
<b>Min safe end Discharge Voltage</b>	1,60 V/cell
<b>Self discharge per month at 20°C</b>	3%
<b>Recommended Charging Voltage at 20°C</b>	Stand-by use (V/cell): 2,25 to 2,30 Cycle use (V/cell): 2,40 to 2,50
<b>Container Material</b>	ABS-UL94 HB
<b>Electrolyte Type</b>	Sulfuric Acid
<b>Type of plates / Alloy</b>	Flat plates / Lead-Calcium-Tin alloy
<b>Type of Separator</b>	Absorbant Glass Mat
<b>Valve Type / Operational Pressure</b>	Rubber / 1-3 psi (70-200 mbar)
<b>Operating Temperature Range</b>	-20 to + 50 °C
<b>Storage time at 20°C</b>	9 months

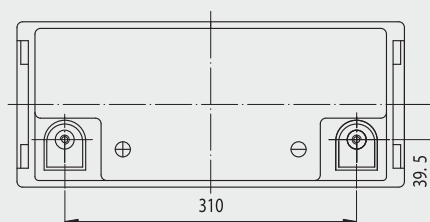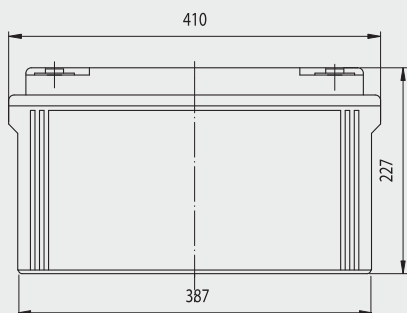

**SYSTEMS SUNLIGHT S.A.**  
**Headquarters**  
 23rd Km. N.R. Athens - Lamia,  
 145 65 Agios Stefanos - Attica, Greece  
 Tel.: +30 210 624 5400,  
 Fax: +30 210 624 5409

**Manufacturing Plant**  
 Neo Olvio  
 67 200 Xanthi, Greece  
 Tel.: +30 25410 48100,  
 Fax: +30 25410 95446

 **SUNLIGHT**  
 creating energy  
[www.sunlight.gr](http://www.sunlight.gr)